


NOTES: UNLESS OTHERWISE SPECIFIED


1. COSMETIC SPECIFICATION REFER TO WI-QA-038.



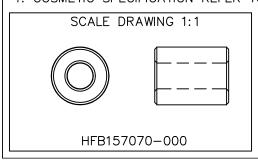

NET IMPEDANCE (Z)					
Frequency	300 MHz	500 MHz	1 GHz		
Nominal (REF)	170 Ω	200 Ω	205Ω		
Minimum _	- Ω	_160 Ω	- Ω		

NET Z,R AND X vs. FREQUENCY (REF. ONLY)

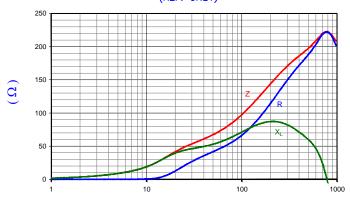

FREQUENCY (MHz)

AGILENT E4991A Impedance/Material Analyzer HP 16092A-Test Fixture

FERRITE CORE DIMENSIONS (SPEC) MM[Inches]:

A 15.65 [.616] ± 0.30 [.012]
B 6.99 [.275] ± 0.15 [.006]
C 20.00 [.787] ± 0.41 [.016]

WEIGHT/1000 15.10 kgs [33.28 Lbs]

DIMENSIONS ARE IN mm [INCHES].			This print is the property of Laird			
				Tech, and is loaned in confidence		
				subject to return upon request and with the understanding that no copies shall be made without the		
				copies shall be made without the		
				written consent of Laird Tech. All rights to design or invention are		
				reserved.		
				PROJECT/PART NUMBER: REV DRAWN BY:		
				HFB157070-000 C JRK		
O	UPDATE COMPANY LOGO	01/07/13	QIU	HFB13/0/0=000 • • • • • • • • • • • • • • • •		
В	UPDATE PRINT FORMAT & Z SPECS	03/26/03	JRK	DATE: 10/14/02 SCALE: 3:1 MATERIAL:		
Α	ORIGINAL DRAFT	10/14/02	JRK	CAD # ITOOL #		
REV	DESCRIPTION	DATE	INT	HFB157070-000-C		