



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE	DIMENSIONS in. [mm]				
		L ± .03 [0,8]	W ± .01 [0,3]	C ± .01 [0,3]	M ± .03 [0,8]	H ± .01 [0,3]
PV14-6FFB	#6	.80 [20,3]	.28 [7,1]	.19 [4,8]	.64 [16,3]	.15 [3,8]
PV14-8FFB	#8	.86 [21,8]	.31 [7,9]	.23 [5,8]	.68 [17,3]	.17 [4,3]
PV14-10FFB	#10	.86 [21,8]	.35 [8,9]	.23 [5,8]	.68 [17,3]	.20 [5,1]

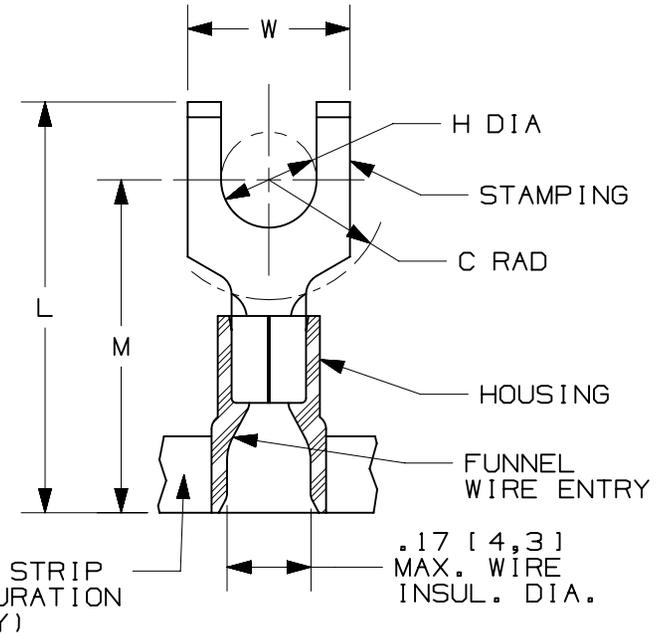

NOTES:

- USED FOR:
 - #16-14 AWG [1,5-2,5 mm²] SOLID OR STRANDED COPPER WIRE ONLY
 - 221°F [105°C] MAX. OPERATING TEMPERATURE
 - 600 V. MAX. VOLTAGE RATING
- INSTALLATION TOOLS:
 - PRESSES: CP-851, CP-860, CP-861
 - APPLICATOR: CA-800
 - DIE INSERTS: CD-800-2
- WIRE STRIP LENGTH: 1/4" ^{+1/32} [6,4^{+0,8}]
- MATERIAL:
 - STAMPING: BRASS, NICKEL PLATED
 - HOUSING: VINYL, BLUE
- SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT



LISTED
587H
E52164



CERTIFIED
LR31212

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
07	10.25.12	JBN	LSM	VMB	REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.	A41077

TITLE FLANGED FORK TERMINALS, VINYL INSULATED FUNNEL ENTRY CUSTOMER DRAWING	
ITEM REVISION NAME N41077BA/07	PANDUIT TM
DATASET FILE NAME N41077BA_DC/07A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [0.127] .xx ± .01 [0.25] ANGLES ± 5°	
DRAWING NUMBER: A41077	
DRAWN BY FES	DATE -
CHK FS	SCALE N.T.S.
SHEET 1 OF 1	
SIZE A	

D10100DA/12